

ideaalne lahendus


kinnitusvahendi WT-T-6,5 x L m  dud

T��p	Materjal	L��bim��t d _i [mm]	Pikkus [mm]	S _g [mm]	S _{clamp} [mm]	d _k	Otsak
WT	T	6,5 x	65	28	28	8,0	T30
WT	T	6,5 x	90	40	40	8,0	T30
WT	T	6,5 x	130	55	55	8,0	T30
WT	T	6,5 x	160	65	65	8,0	T30
WT	T	6,5 x	190	80	80	8,0	T30
WT	T	6,5 x	220	95	95	8,0	T30

kinnitusvahendi WT-T-8,2 x L m  dud

T��p	Materjal	L��bim��t d _i [mm]	Pikkus [mm]	S _g [mm]	S _{clamp} [mm]	d _k	Otsak
WT	T	8,2 x	160	65	65	10,0	T40
WT	T	8,2 x	190	80	80	10,0	T40
WT	T	8,2 x	220	95	95	10,0	T40
WT	T	8,2 x	245	107	107	10,0	T40
WT	T	8,2 x	275	122	122	10,0	T40
WT	T	8,2 x	300	135	135	10,0	T40
WT	T	8,2 x	330	135	135	10,0	T40

Materjal: s  sinikterasest; pind: Durocoat  

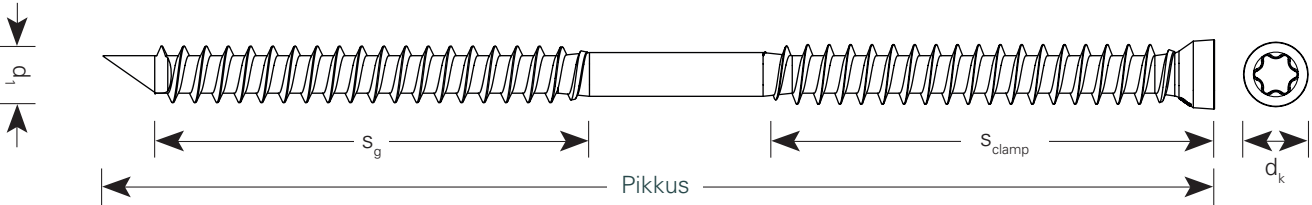

All calculations have to be checked and approved by the responsible planner ahead of execution. The user is responsible to assure compliance with all applicable laws and regulations.

   SFS intec, i-TW 905473, 08-2014
WT_Smart-Bite_en_CH_Hgg_1.01
Technical changes reserved

SFS intec Oy Eesti filiaal
Ehitus Division
EE-11313 Tallinn

ee.info@sfsintec.biz
www.sfsintec.biz/ee




SFS intec
Turn ideas into reality.



TARK-TORGE

Puurots, mis muudab maailma

Antud, toote uus ekstsentriline puurots on WT-T kinnitussüsteemis täiesti uus ja ebatavaline. See varasem KRKGH-müra montaažil kuulub täna töötades puitehitustöodel minevikku. Samuti uus WT-T on kiirem, täpsem ja minimeeritud oma nõudmistega puitliidetes. Tänu uuele otsale tungib kinnitustarvik puitu vaevata - see on põhjus, miks me nimetame uut WT-T puidu isekeermestavat kruviotsa kui TARK-TORGE.

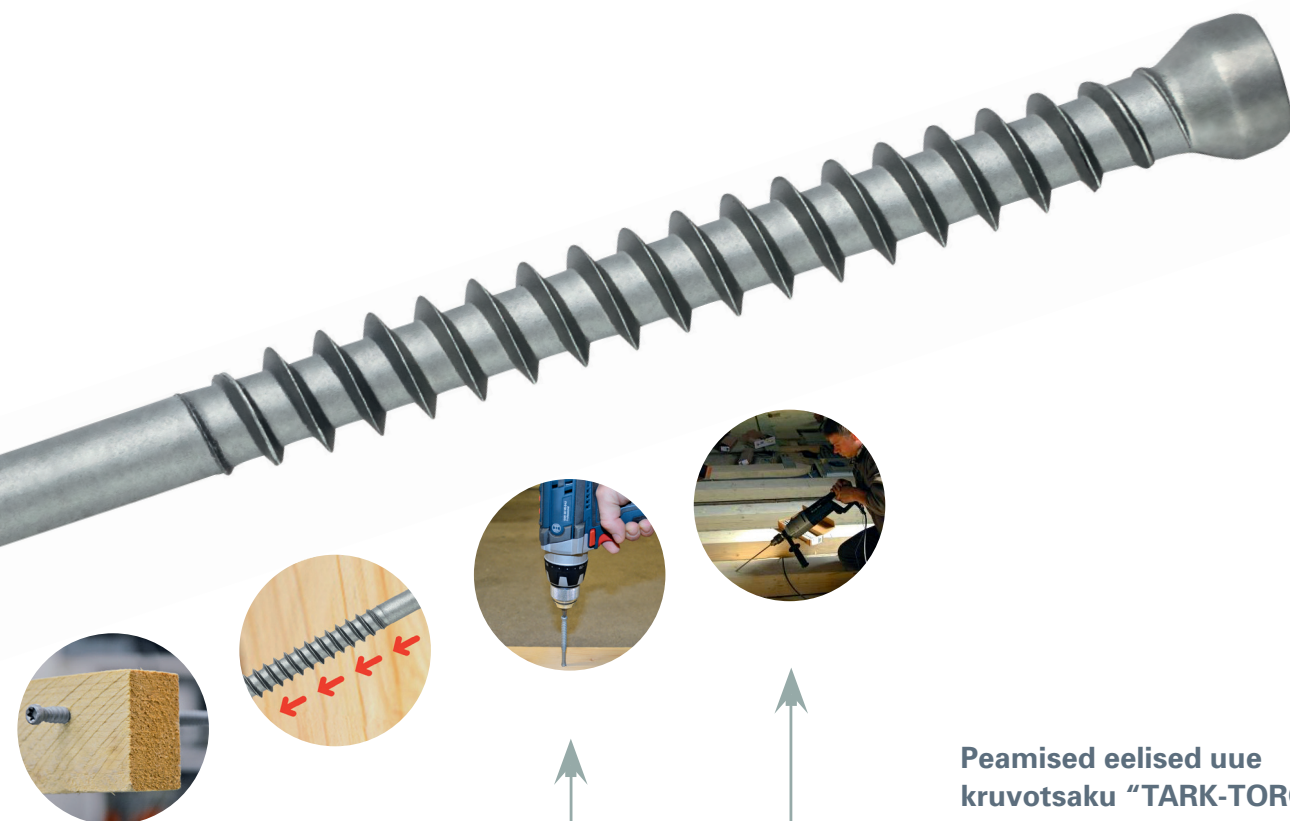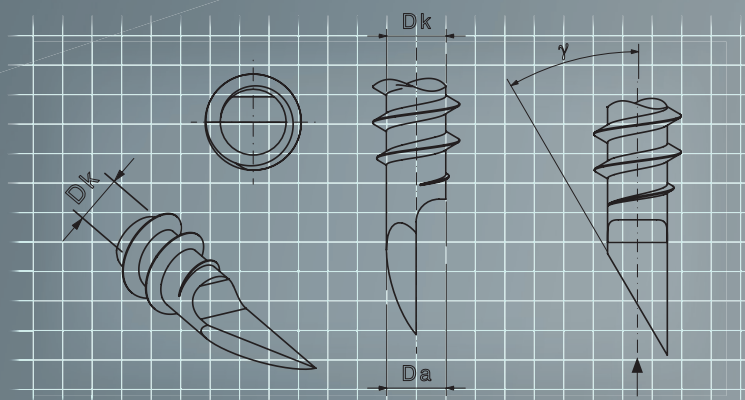

Peamised eelised uue kruvitsaku "TARK-TORGE" juures on lühidalt välja öeldes antud WT-T kinnitussüsteemis järgmised:

Ei juhtavale ning väga hea otsa kontakt 45° nurga all.

Kiire, kindel ja lihtne montaaž 90° all kinnitamisel.

Väga madal väände- ja pöördemoment montaažil.

Ei pragudele! Otsak hoiab ära puidulõhenemise kinnititsoonis.